

SERIE A CAPITOLATO FIAT

FOAMS ACCORDING FIAT STANDARDS



TIPO SCHIUMA	DENSITÀ	PORTANZA	CARICO A ROTTURA	ALLUNGAMENTO A ROTTURA	CELLE/cm	RIGIDEZZA SECONDO FIAT 9-55260
TYPE	DENSITY	HARDNESS	TENSILE STRENGTH	TENSILE ELONGATION	CELLS/cm	HARDNESS ACCORDING FIAT 955260 NORM
METODO / METHOD	kg/m ³ ISO 845	kPa ISO 3386	kPa (min.) ISO 1789	% min ISO 1789	nr/cm TG	g/cm ²


ESTERE / ESTER

N24U75	23 - 25	3 - 5	150	150	17 - 23	60 - 90
N25U75	22,5 - 26,5	4 - 6	120	150	15 - 19	60 - 90
N28U60	26 - 29	2,5 - 4,5	150	150	18 - 24	45 - 75
N35U90	32 - 38	4 - 6	120	150	22 - 28	70 - 110
N43U90	41 - 45	4,5 - 6,5	120	150	23 - 29	80 - 120
N46U90	44 - 48	4,5 - 6,5	70	100	23 - 29	80 - 120
N45TR	41 - 47	4,5 - 6,5	150	200	20 - 26	70 - 110
N50TR	47 - 53	4,5 - 6,5	100	150	20 - 26	70 - 110
N55TR	50 - 60	4 - 6	150	150	22 - 28	60 - 100
45U100	43 - 47	4,0 - 7	120	120	19 - 23	80 - 120
50U100	47 - 53	4,5 - 6,5	100	150	19 - 23	80 - 120



Toscanagomma

www.toscanagomma.eu

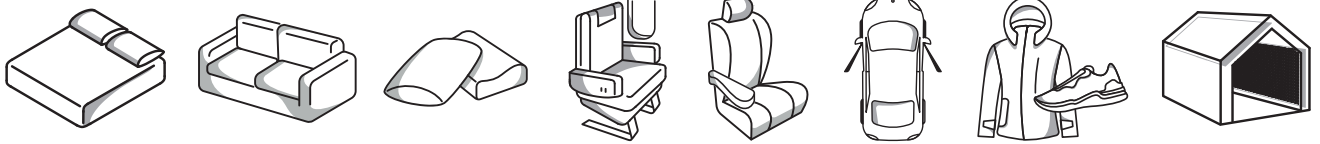

AZIENDA CERTIFICATA
CERTIFIED COMPANY



CERTIFICAZIONI*
CERTIFICATION*



OEKO-TEX® Standard 100
Certificate No.: 070959.0